


# PORT-A-COOL® FILLER CART SETUP AND OPERATION PAC2K163SFC, PAC2K161SFC and PAC2K16HPVSFC

1. Fill water supply tank with water. (See Figure A) Tank holds 22 gallons and will operate unit for up to eight to ten hours depending on local climate conditions.
2. Move unit to location where it will be used.
3. Plug electrical supply cord into electrical outlet. (See Figure B).
4. Open water adjustment valve (See Figure C) to allow maximum water flow.
5. Turn pump switch to “ON” and allow cooling media to wet out (saturate). (See Figure D)


**CAUTION**  
**DO NOT**  
**ATTACH**  
**WATER HOSE**  
**TO**  
**FILLER CART UNIT.**  
**THIS UNIT**  
**DESIGNED FOR**  
**TANK USE**  
**ONLY!**

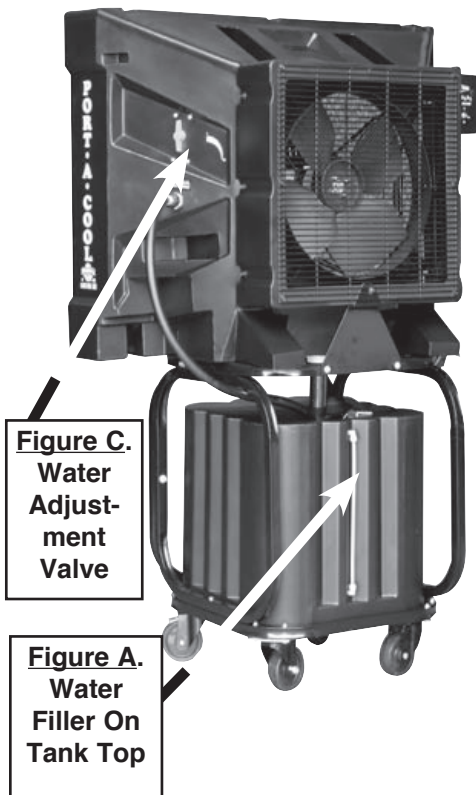

6. Turn fan switch to “ON” and regulate water flow and fan speed for desired cooling following Owner’s Manual instructions for operation. (See Figure E)

7. Consult Unit Owner’s Manual for Storage and Maintenance.

(Revised 2/07)

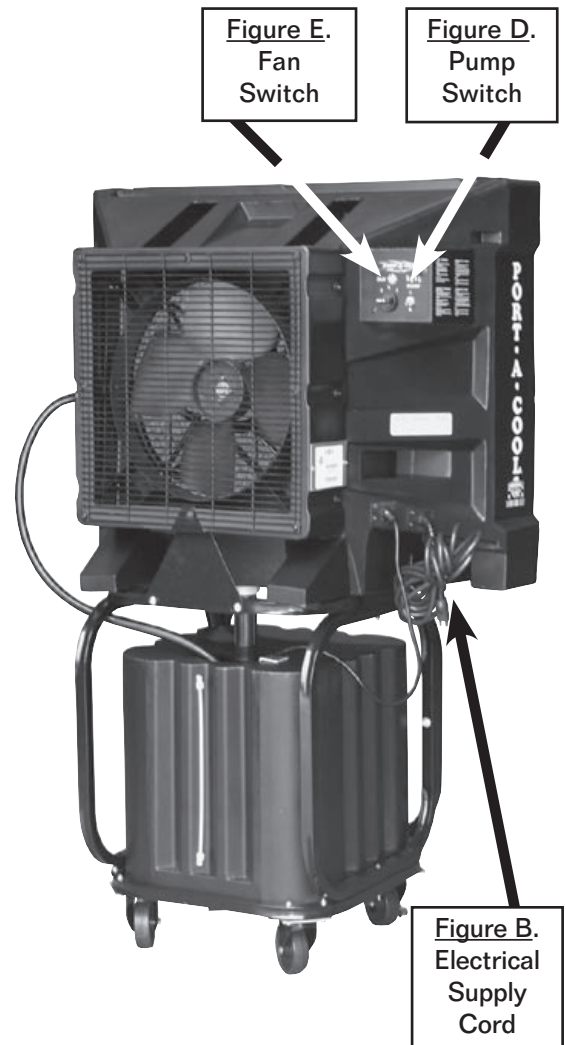

**CAUTION**  
**DO NOT RUN PUMP**  
**WITHOUT WATER**  
**IN TANK!**